



SECTION E-E

SHAFT DETAIL

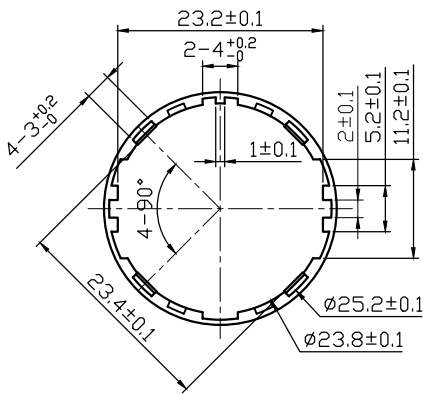

CENTER HOLE DETAIL

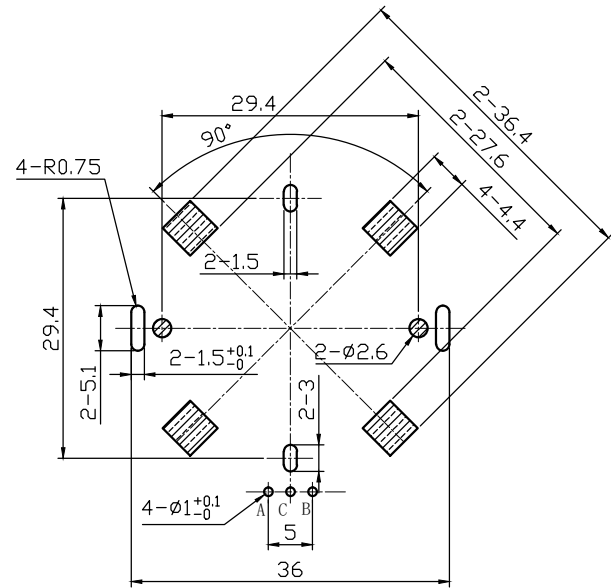

P. C. B. MOUNTING DETAIL

深圳市亦盛电子科技有限公司

Shenzhen Yisheng Electronic Technology Co., Ltd.

品名

EC3501 C15H30P3

图号

EC3501-002

日期

修改记录

绘制人

未标注尺寸公差

比例

3:1

2021/11/16

初始发行受控

L $\leq 10$

$\pm 0.3$

单位

mm

核准

审核

制图

10 < L  $\leq$  100

$\pm 0.5$

版本


A0

100  $\leq$  L

$\pm 0.8$

ANGLE

$\pm 5^\circ$



深圳市亦盛电子科技有限公司  
EC35 SERIES SPECIFICATION  
EC35系列规格书

1/4

1、 General 一般事项

1-1、 Scope 适用规格

This specification applies to 35mm size low-profile thin rotary encoder (incremental type) for microscopic current circuits used in electronic equipment.

本规格书适用于电子设备用微小电流回路35型回转式编码器。

1-2、 Standard atmospheric conditions标准状态

Unless otherwise specified ,the standard range of atmospheric conditions for making measurements and test is as following limits:

除另有规定外，测量应在以下状态下进行：

Ambient temperature温度： 15°C to 35°C

Relative humidity相对湿度： 25% to 85%

Air pressure气压 : 86kPa to 106kPa

1-3、 Operating temperature range

使用温度范围 : -20°C to 70°C

1-4、 Storage temperature range

保存温度范围 : -40°C to 85°C

2、 Construction 构造

2-1 Dimensions 尺寸

Refer to attached drawing 见所附成品图

3、 Rating 额定值

3-1、 Rated voltage 额定电压: DC 5V

3-2、 Maximum operating current (resistive load)最大额定电流（阻抗负载）

Each lead 各相导线 : 0.5mA (MAX 5mA; MIN 0.5mA)

Common lead 公共导线: 1mA (MAX 10mA; MIN 0.5mA)

4、 Application Notes 使用上的事项

4-1、 Avoid storing the products in a place at high temperature, high humidity and in Corrosive gases. Please use this product as soon as possible with 6 months limitation . If any remainder left after packing is opened, please store it with proper moistureproofing, gasproofing etc.

避免储藏于高温,潮湿及腐蚀的场所. 产品购入后尽可能在6个月内使用完. 拆包装后未使用完的剩余产品需储藏于防潮防毒的环境下.

4-2. The encoder pulses count method should be designed with taking operating speed ,sampling time and design of the microcomputer software into consideration.

编码器信号的计算方法应将操作的速度,信号的取样时间及电子回路中的微电脑软体等考虑进去.

4-3、 With this products ,detent positon will always be aligned with A-OFF or ON phase. Therefore make the A phase the reference at the soft ware design stage.

此产品在定位点状态时A相波形是处于OFF或ON状态,因此在设计软体时请留意此现象.



4-4、 At design of the pulse count process. Using the C/R filter circuit is Recommended.

在设计时要考虑到杂讯,建议使用C/R滤波电路.


4-5、 Care must be taken not to expose this product to water or dew to prevent possible problem in pluses output waveform.

本产品请勿碰触到水,可能会导致输出波形的异常.

EC35系列规格书

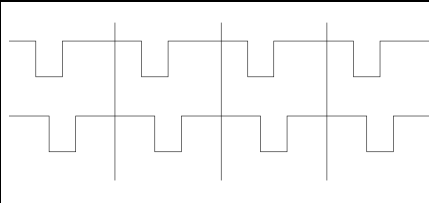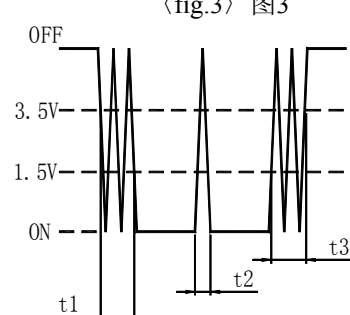4、ELECTRICAL CHARACTERISTICS 电气性能			
ITEM 项目	CONDITIONS 条件	SPECIFICATIONS 规格	
4-1、Output signal format 输出信号	Note: Output signal is 1 pulse per 2 detents. And terminal A-C is pulse OFF or ON at detent position. No specified output of terminal B-C at detent position. 注意事项：输出信号方式是2个定位1个脉冲。在定位点位置时A-C端子处于OFF或ON状态，而B-C端子间不作特定要求。	2 Phase-different signals (signal A, signal B) Details shown in <fig.1> (The broken line shows detent position .) A、B两信号输出波形详见（图1） 卡点位置如下 图所示：(虚线表示带卡点装置的上擎子处位置。)	
	Shaft rotational direction 轴回转方向	Signal 信号	Output 输出波形
	C.W. 顺时针方向	A(Terminal A-C) A(A-C端子间)	
		B(Terminal B-C) B(B-C端子间)	
4-2、Resolution 分解能力	Number of pulses in 360° rotation. 回转360°的输出脉冲数。	30 pulses/360° for each phase 30个脉冲/360° 每相	
4-3、Switching characteristics 开关特性	Measurement shall be made under the condition as follows. 1)Shaft rotational speed : 360°/S 2)Test circuit : (fig.2) 下（图2）所示回路，轴以360°/秒的速度回转测定。	<fig.3> 图3 	
4-3-1、Chattering 振荡	Specified by the signal's passage time from 1.5V to 3.5V of each switching position (code OFF→ON or ON→OFF) 编码从OFF→ON或ON→OFF时，输出1.5V~3.5V通过的时间应符合规定。	On the case within detent, B signal will be irregular oscillation.带卡点时,在卡点位置上的B信号振荡无规定。 t1,t3 ≤ 3mS	
	Specified by the time of voltage change exceed 1.5V in code-ON area. When the bounce has code-ON time less than 1mS between chattering (t1 or t3).the voltage change shall be regarded as a part of chattering. When the code-ON time between 2 bounces is less than 1mS.they are regarded as 1 linked bounce. 编码ON部分的1.5V以上的电压变动时间在振荡t1,t3之间会产生1毫秒以上1.5V以下的ON部分.另外,如果各突跳间1.5V以下的范围在1毫秒以上时,则判定为另一个突跳。	t2 ≤ 2mS	

深圳市亦盛电子科技有限公司  
**EC35 SERIES SPECIFICATION**  
**EC35系列规格书**

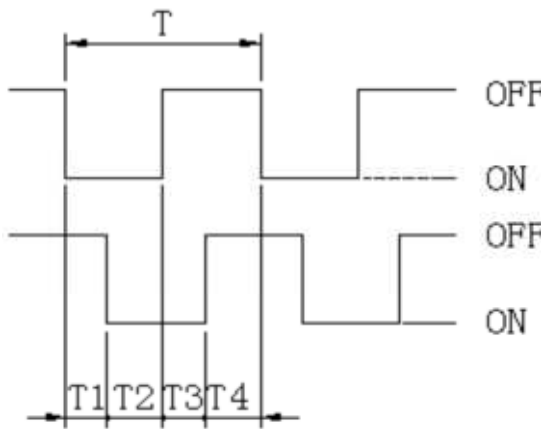4、ELECTRICAL CHARACTERISTICS 电气性能		
ITEM 项目	CONDITIONS 条件	SPECIFICATIONS 规格
4-3-3、Sliding noise 滑动噪音	The voltage change in code - OFF area. 编码OFF部分的电压变动。	3.5V MIN 3.5V 以上
4-4、Phase difference 相位差	Measurement shall be made under the condition which the shaft is rotated in constant speed. 以固定的速度操作轴进行回转。 (Fig.4)图4  	T1、T2、T3、T4 ≥ 5mS In(fig.4) 见图4
4-5、Insulation resistance 绝缘电阻	Measurement shall be made under the condition which a voltage of 110V DC 1min is applied between individual terminals and bushing. 在端子和安装板间施加电压 110V DC 1分钟。	Between individual terminals and bushing 10MΩ MIN. 端子安装板间电阻10MΩ以上。
4-6、Dielectric strength 耐电压	A voltage of 110V AC shall be applied for 1 minute between individual terminals and bushing. 在端子和安装板间施加 AC 110V电压1分钟。	Without arcing or breakdown. 不得有绝缘破坏。
5 Mechanical characteristics 机械性能		
ITEM 项目	CONDITIONS 条件	SPECIFICATIONS 规格
5-1、Total rotational angle 全回转角度		360°(Endless) 360°(无止挡点)
5-2、Rotation torque 旋转力矩		3~20mN.m. (30~200gf.cm)
5-3、Number and position of detent 定位点数及位置		30 detents(Step angle:12±2°) 30点定位 (间隔角度 12°±2°)
5-4、Terminal strength 端子强度	A static load of 3N(0.31kgf) shall be applied to the tip of terminals for 10S in any direction. 端子前端的任意方向施加3N(0.31kgf)的静负荷力10秒钟。	Without excessive play in terminal or poor contact. 端子不得有明显松动及接触不良。
5-5、Side thrust strength of shaft 轴的垂直押引强度	A load of 20N(2.04Kgf) shall be applied at the point 5mm from the tip of the shaft in a direction perpendicular to the axis of shaft for 10S. 在轴前端5mm处加20N(2.04Kgf)的静负荷力10秒钟。	Without excessive play of bending in shaft. No mechanical abnormally. 轴不得有明显松动及接触不良。

# 深圳市亦盛电子科技有限公司

## EC35 SERIES SPECIFICATION

4/4

### EC35系列规格书

5-6、Shaft play in rotational wobble 轴的回转方向摆动	Testing by angle board. 用角度板测定.	4° MAX 4° 以下		
5-7、Push-pull strength of shaft 轴推拉强度	Push and pull static load of 10Kg shall be applied to the shaft in the axial direction for 10S.(After soldering of the PC board) 在轴端,沿轴向施加10Kg的静负荷力推和拉各10秒钟(焊锡固定在PCB上)。	Without damage or excessive play in shaft No excessive abnormality in rotational feeling.And electrical characteristics shall be satisfied. 轴无破损,回转无异常;电气性能无异常.		
<b>6 Endurance characteristics耐久性能</b>				
<b>ITEM 项目</b>	<b>CONDITIONS 条件</b>	<b>SPECIFICATIONS 规格</b>		
6-1、Rotational life 回转寿命	The shaft of encoder shall be rotated to 30,000cycles at a speed of 600~800 cycles/H without electrical load,after which measurements shall be made. 在无负荷条件下轴以600~800周/小时速度回转30,000周。	Chattering t1,t3≤5mS 振荡 t1, t3≤5mS Bounce t2≤3mS 突跳 t2≤3mS Torque: Relative to the previously specified value: -50%~+10% 力矩: 为原始规格值的 -50%~+10%		
6-2、Damp heat 耐湿性	The encoder shall be stored at temprature of 40±2°C with relative humidity of 90% to 95% for 96±4H in a thermostatic chamber .And the encoder shall be subjected to standard atmospheric conditions for 1.5H, After which measurements shall be made. 温度40±2°C,湿度90~95%的恒温恒湿槽中放置96±4小时后,在常温、常湿中放置1.5小时后测试.	Specifications in clause all items is shall be satisfied. 所有项应满足初期规格		
6-3、Dry heat 耐热性	The encoder shall be stored at a temprature of 80±3°C for 96±4H in a thermostatic chamber.And then the encoder shall be subjected to standard atmospheric conditions for 1.5H .After witch measurement shall be made.温度80±3°C的恒温箱中放置96±4小时,常温、常湿放置1.5小时后测试.	Specifications in clause all items is shall be satisfied. 所有项应满足初期规格		
6-4、Cold 低温特性	The encoder shall be stored at a temprature of -25±3°C for 96±4H in a thermostatic chamber.And then the encoder shall be subjected to standard atmospheric conditions for 1.5H .After witch measurement shall be made .温度-25±3°C的恒温箱中放置96±4小时,常温、常湿放置1.5小时后测试.	所有项应满足初期规格 Specifications in clause all items is shall be satisfied.		
6-5、Resistance to Soldering heat 耐焊接热	Manual soldering手工焊接 Bit temperature of soldering iron: 300°C less than Application time of soldering iron: within 3s 温度300°C以下, 时间3秒以内。 Dip soldering槽焊 Printed wiring board : single-sided copper clad laminate board with thickness of 1.6mm. 使用基板: t=1.6mm的单面覆铜板。 Preheating : 1、 Surface temperature of board: 100°C or less. 2、 Preheating time : within 1 min. 预热: 基板表面温度100°C以下, 时间1分钟以内。 Soldering : Solder temperature : 260±5°C or less Immersion time :within 3S 焊接: 温度260±5°C或以下, 时间3秒以内。	Electrical characteristics shall be satisfied No mechanical abnormality. 不得有绝缘体的破损、变形、接触无异常。		
制作日期	版本	变更内容	制作:	TITLE: EC35 SPECIFICATION
2019-1-29	A0		审核:	Name: SPECIFICATION
			批准:	DOCUMENT NO: EC35-02
				Page:4